

VertX™ V200 Input Monitor Interface



ALARM INPUT PROCESSING FOR UP TO 16 ZONES • 70200

- Reports supervised or unsupervised alarm circuits.
- Off-normal condition programmable for each input point (NO or NC alarm devices may be used).
- Connects to the V1000 via RS-485.
- Receives and processes real-time commands from the V1000.
- Reports all activity to the V1000.
- Enables complex input/output linking when used with the V1000 and V300 Output Control Interface.
- Attractive polycarbonate enclosure protects components from damage.
- All connections and indicators are fully identified by silk-screened nomenclature on the cover.
- UL® 294 and UL® 1076 recognized components.

The HID VertX™ products provide a complete and fully featured hardware/firmware infrastructure for access control software host systems. The V200 input monitor interface connects up to 16 supervised input circuits. Each input point monitors and reports normal, off-normal, and alarm states. The V200 features on-board flash memory, enabling program updates to be downloaded through the network.

The V200 connects to the V1000 via a high-speed RS-485 network. The V1000, in turn, communicates with the system host via industry standard TCP/IP protocol, over 10/100 Mbps Ethernet, or the Internet. This architecture minimizes the impact on corporate LANs, by using only one TCP/IP address for every 32 interfaces, and by handling low-level transactions on the RS-485 network.

MOUNTING:

Mount to any wall surface, using four screws. For UL* compliance, one or more interfaces can be mounted inside a locking customer-supplied NEMA-4 rated enclosure with:

- DC supply with battery back-up
- Enclosure tamper switch
- All connections made through conduit

The unit should be installed indoors, inside a secure area, such as in an IT or telecommunications room, utility closet, or on a wall above a suspended ceiling.

VISUAL INDICATORS

Communications LED flashes green for "transmit to host" and red for "receive from host." Power LED indicates that sufficient DC voltage is being provided to the unit.

EASILY INTERFACED

- Quick-disconnect screw terminal connectors
- Rotary address switch (0-15)
- Inputs for:
 - 16 input circuits
 - AC Fail Monitor*
 - Battery Fail Monitor*
 - Enclosure Tamper*

*Can be configured as a general purpose input

NON-LATCHING RELAY OUTPUTS (RATED 2A @ 30 VDC):

- 2 door strikes (configurable)
- 2 auxiliary devices: door held/forced alarm, alarm shunt, host off-line (comms down), or general purpose

LOCAL PROCESSING

- Alarm shunt and strike relay timing and latching functions
- Access control decisions based on facility code (degraded mode)
- Basic input/output linking
- LED/beeper control during card + PIN, scheduled unlock, and other transactions


MICROCONTROLLER

WARRANTY

Warranted against defects in materials and workmanship for 18 months (see complete warranty policy for details).

PART NUMBERS

Base Part Number: 70200

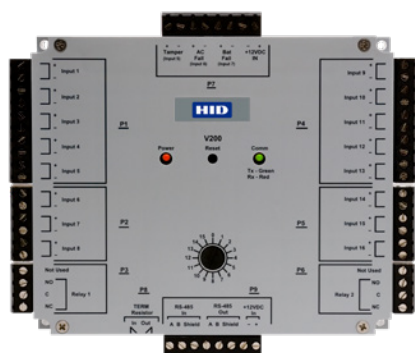

SPECIFICATIONS

Dimensions	5.8" W x 4.825" H x 1.275" D (147.32 mm x 122.55 mm x 32.38 mm)
Weight	12.4 oz (.35 kg)
Enclosure Material	UL94 Polycarbonate
Power Supply Requirements	50 mA @ 9-18 VDC. Recommended: Supervised linear power supply with battery back-up, input surge protection, and AC fail and battery low contact outputs. Separate supervised DC supply with battery back-up recommended for relay-activated devices.
Operating Environment	Indoors, or customer-supplied NEMA-4 rated enclosure
Operating Temperature	32° to 122° F (0° to 50° C)
Operating Humidity	5% to 95% relative, non-condensing
Storage Temperature	-67° to 185° F (-55° to 85° C)
Communications Ports	RS-485 — two wire
Certifications	UL* 294 and UL* 1076 Recognized Component for the US, CSA 205 for Canada, FCC Class A Verification, EMC for Canada, EU (CE Mark), Australia (C-Tick Mark), New Zealand, Japan EN 50130-4 Access Control Systems Immunity for the EU (CE Mark)
Cable Distance	RS-485 — 4000 feet (1220 m) to host, using Belden 3105A, 22 AWG twisted pair, shielded 100Ω cable. Input Circuits — 500 feet (150 m), two-conductor, shielded, using ALPHA 1292C (22 AWG) or Alpha 2421C (18 AWG); Output Circuits — 500 feet (150 m), 2-conductor, using ALPHA 1172C (22 AWG) or Alpha 1897C (18 AWG). Minimum wire gauge depends on cable length and current requirements.



North America: +1 512 776 9000
Toll Free: 1 800 237 7769
Europe, Middle East, Africa: +44 1440 714 85
Asia Pacific: +852 3160 9800
Latin America: +52 477 779 1492

hidglobal.com

ASSA ABLOY

An ASSA ABLOY Group brand

© 2018 HID Global Corporation. All rights reserved. HID, the HID logo and VertX are trademarks or registered trademarks of HID Global in the U.S. and/or other countries. All other trademarks, service marks, and product or service names are trademarks or registered trademarks of their respective owners.
201806-26-pacs-vertx-v200-controller-ds-en

PLT-00570